


Slideway lubricant

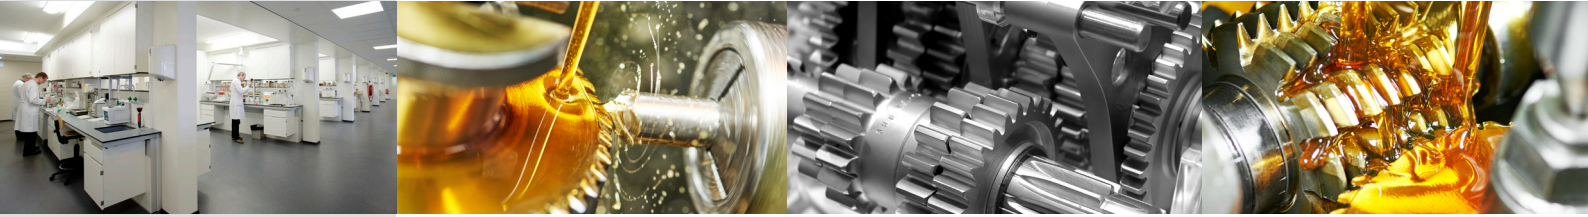

Description

Milpro WAY VG32 is an universal machine tool lubricant, based on mineral oil, under addition of several additives.

Application

This oil is a machine tool lubricant specially designed for tableway lubrication, with emphasis on superior stick-slip properties. This machine tool lubricant also meets the requirements of hydraulic systems, gear boxes and spindles in most machine tools.

Features and benefits

- Good resistant towards high pressures and high loads.
- A very strong adhesion to (vertical) slides.
- Superior "stick-slip" properties.
- Very good anti- wear, anti-rust and anti-corrosion properties.
- Excellent demulsification properties.
- Good filterability.

Performance level

DIN 51517-3 CLP

FZG 12

DIN 51524-2 HLP

Typical characteristics

	Test method	Units	Grade
ISO viscosity grade			32
Density at 15°	ASTM D4052	Kg/L	0,870
Viscosity at 40°C	ASTM D445	mm ² /s	32
Viscosity at 100°C	ASTM D445	mm ² /s	5,6
Viscosity index	ASTM D2270		112
Flash point COC	ASTM D92	°C	212
Pour point	ASTM D97	°C	-24

Above figures are typical of those obtained with normal production tolerance and do not constitute a specification.

Handling and storage

All packages should be stored under cover. Outside drums should be in a horizontal position. Protect against freezing and temperature above 40°C.

Packaging type

5, 25, 200 and 1.000 litres and bulk.

Safety Data Sheet

The Safety Data Sheet should be consulted for specific information and information on Health, Safety and Environment when handling this product.



Cimcool Industrial Products
Schiedamsedijk 20
3134 KK Vlaardingen
The Netherlands
Tel: +31 (0)10-4600660
cimcool.eu@duboischemicals.com
www.cimcool.com

